




SPECIFICATIONS

Rated Line Pull	2,500 lbs (1,134 kg) Max
Gear Train System	All Metal Planetary Gear
Reduction Ratio	249:1
Motor	3 Hp (2.25 Kw) 12 Volt DC
Winch Line	3/16" x 50' (4.76mm x 15.24m) Cable
Overall Dimensions	13.8" x 4.5" x 4.5" (350 x 114 x 114 mm)
Bolt Pattern	5" x 3" (127 x 76 mm)
Shipping Weight	36 lbs (16.4 kg)

K2500EXTQG

Extreme Trail Series

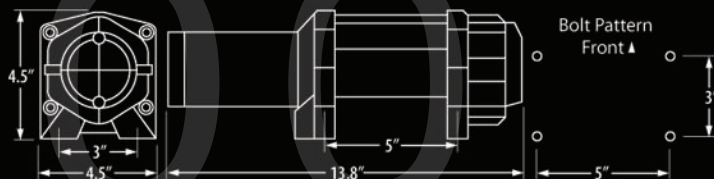

PERFORMANCE OF 1ST LAYER

Line Pull		Line Speed		Motor Current
Lbs	Kgs	Fmp	Mpm	Amp
0	0	19.7	6	31
1000	454	18.4	5.6	105
2000	907	14.8	4.5	145
2500	1135	13.5	4.1	195

LINE PULL & CAPACITY BY LAYER

Cable Layer	Rated Line Pull		Cable Capacity	
	Lbs	Kgs	Ft	Meters
1	2500	1135	9.2	2.8
2	2130	967	20.3	6.2
3	1855	842	33.1	10.1
4	1643	746	39.4	12
5	1475	669	50	15

THIS WINCH INCLUDES

- Pre-wired Handlebar Switch with 8' of Wire
- 50' Winch Cable With Roller Fairlead & Hook
- All Assembly Hardware
- Colour Coded Power Cables



ALL WINCHES INCLUDE

THE BEAR ESSENTIALS KIT

